



**NOTES:**

1. SERIES 8 MIXER ELECTRICAL:
  - 2-1/3 HP., 230/460V., 3 PH., 60 Hz.
  - 120 VOLT INPUT FOR OPERATOR CONTROL CIRCUIT.
- MIXER WATER INPUT:
  - 12 GPM. @ 40 PSI. WITH 1/2" SUPPLY MINIMUM.
2. CRYOLATOR 4.5x6
  - ELECTRICAL = 2 HP., 230/460V., 3 PH., 60Hz.
  - HYDRAULIC = 8 GPM. @ 800 PSI.
3. RESERVE TANK - RT50
  - ELECTRICAL - 230V/460V., 3 PH., 60 Hz.
  - HYDRAULIC - 14 GPM. @ 800 PSI.
4. CONNECTIONS SHOULD NOT INTERFERE WITH EQUIPMENT FUNCTION.
5. FOOD VINYL TUBE (REINFORCED FOR SUCTION) IS USED FOR CONNECTIONS. TUBE BENDS ARE USED AS NEEDED TO PREVENT KINKING.
6. THE MIXING SYSTEM SHOULD NOT BE MORE THAN TWO FEET FROM THE APPLICATOR.
7. MIXER MUST HAVE 24" CLEARANCE ON BOTH SIDES TO OPEN DOORS.

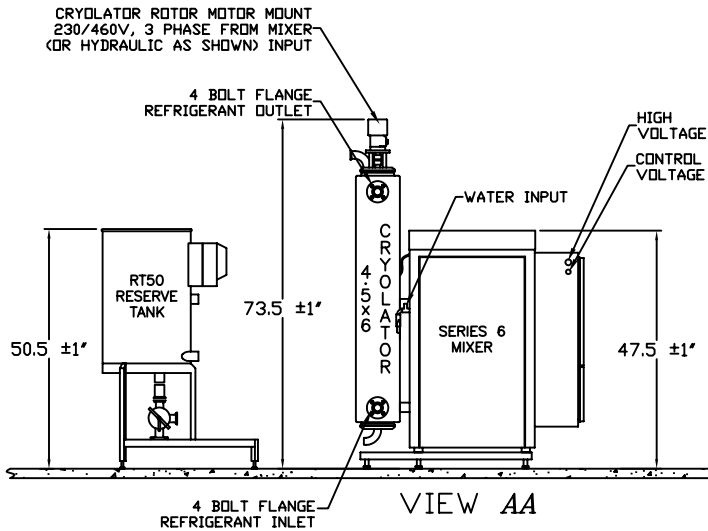

VIEW AA

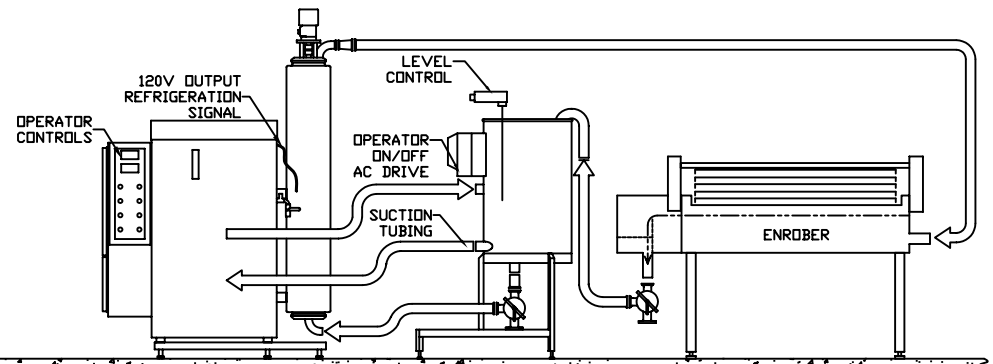

VIEW BB



Wilevco, Inc.  
 10 Fortune Drive  
 Billerica, MA 01821-3996  
 Phone: (978) 667-0400  
 Fax: (978) 670-9191

THIS DRAWING AND ANY DESIGN HEREON IS COPYRIGHT AND REMAINS THE PROPERTY OF WILEVCO INC. IT MAY NOT BE COPIED, LOANED OR DISCLOSED TO A THIRD PARTY WITHOUT WRITTEN CONSENT. IT IS SUBJECT TO RECALL.

No.	Revision	Description	Date	By/APP.

**INSTALLATION LAYOUT  
 SERIES 6 MIXER, CRYOLATOR  
 RESERVE TANK & ENROBER**

Scale: 1 = 1 Date: 08/11/2007 Drawn By: M. R. Lohkamp

Wilevco Item: SE - 0737